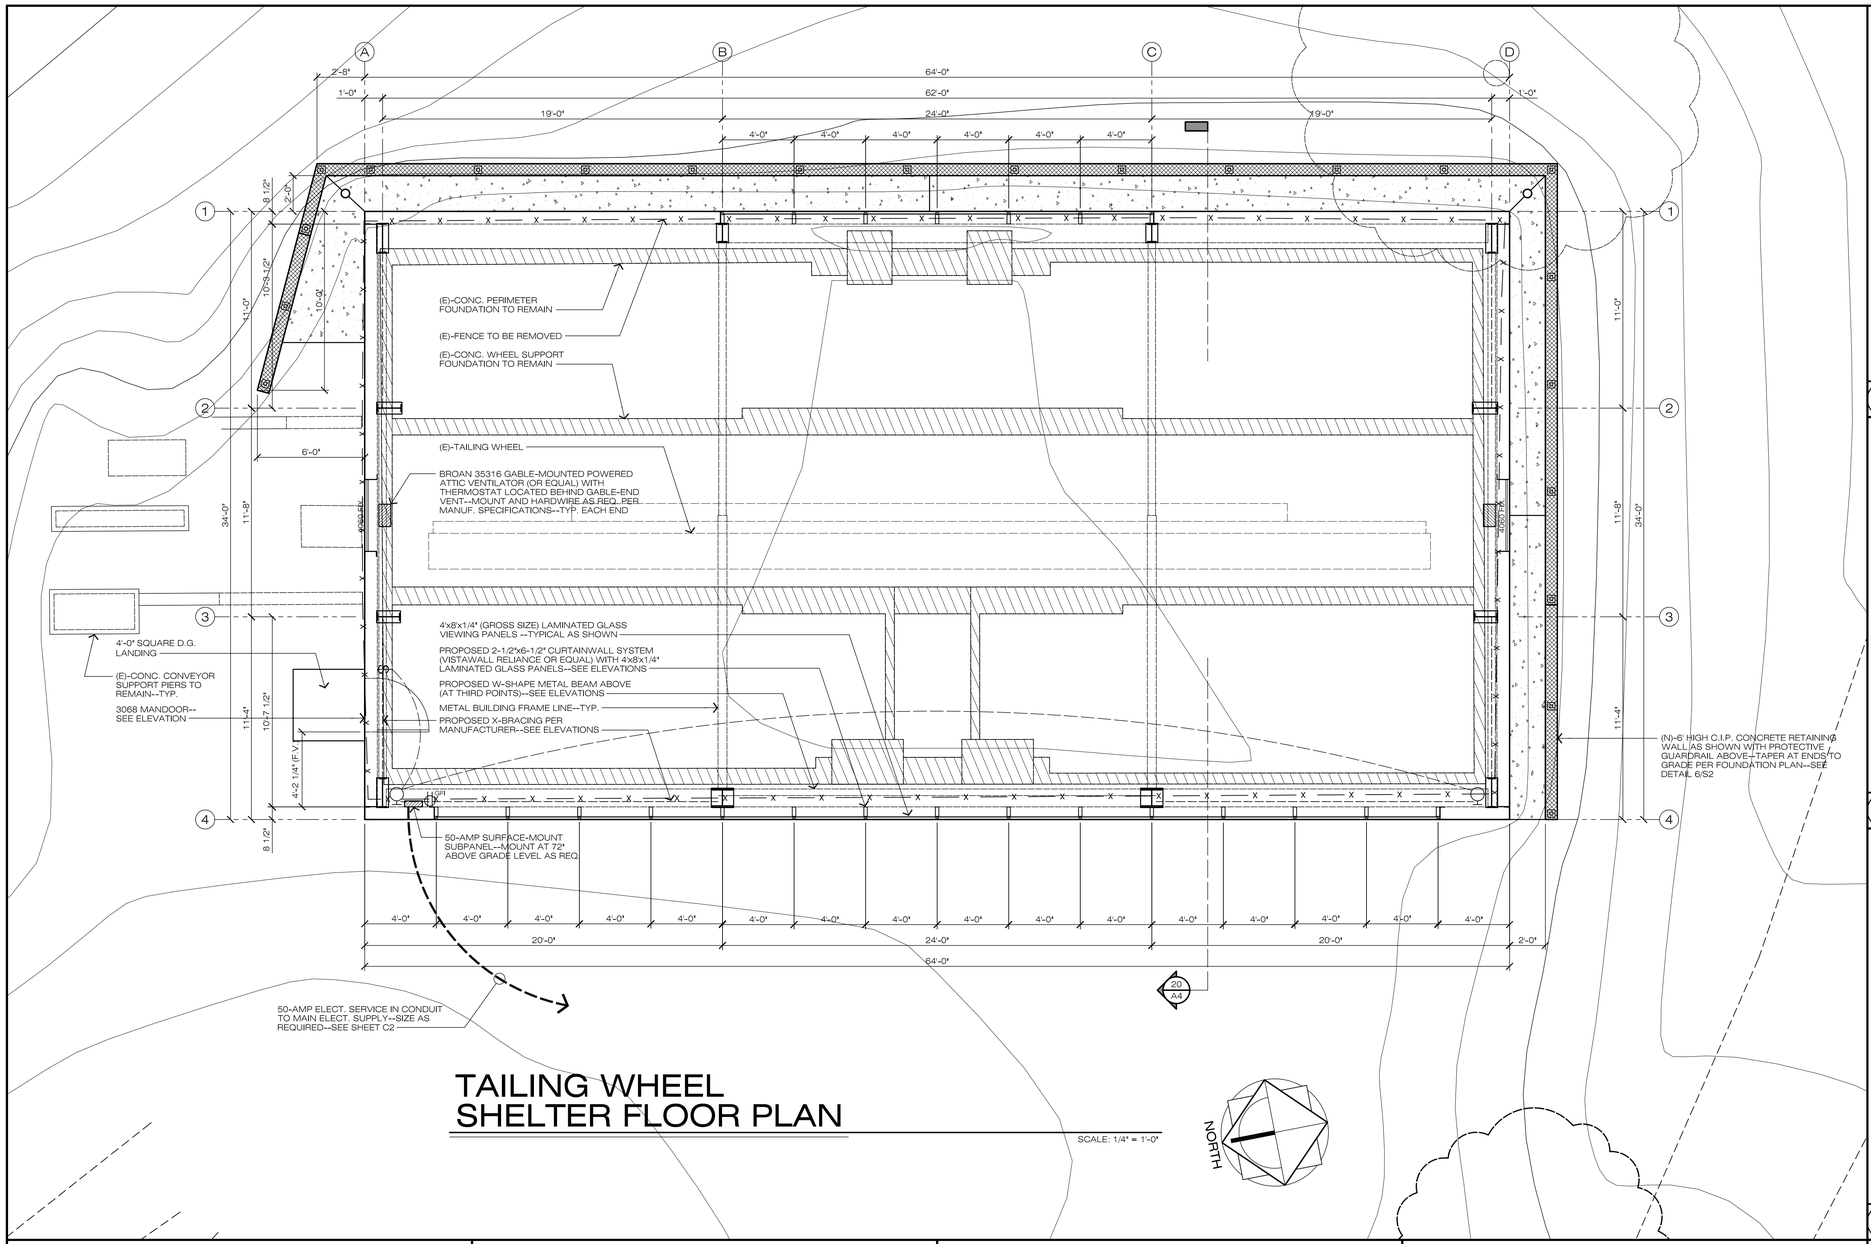

TAILING WHEEL SHELTER FLOOR PLAN

SCALE: 1/4" = 1'-0"

1. THESE DRAWINGS ARE THE PROPERTY OF WRF ENGINEERING AND DESIGN AND SHALL NOT BE USED ON ANY OTHER JOB THAN THAT FOR WHICH THEY WERE INTENDED WITHOUT THE WRITTEN AGREEMENT OF TERRY WEATHERBY, GRANT REYNOLDS, OR KEVIN FRITSON.
2. THE DESIGNER ASSUMES NO RESPONSIBILITY FOR THE QUALITY OF WORK AND MATERIALS, METHODS OF CONSTRUCTION, OR TIMELINESS IN PERFORMANCE OF WORK AT THE JOBSITE.
3. THE OWNER SHALL BE RESPONSIBLE FOR ALL FEES, TAXES, ASSESSMENTS, AND FOR OBTAINING ALL APPLICABLE PERMITS.
4. THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILIAR WITH THE FEATURES OF THE SITE AND THE DRAWINGS PRIOR TO BEGINNING ANY WORK.
5. THE OWNER AND CONTRACTOR SHALL CAREFULLY STUDY AND COMPARE THESE DOCUMENTS. ANY ERRORS, OMISSIONS, OR CONFLICTS SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGNER AS SOON AS POSSIBLE.
6. WRITTEN DIMENSIONS SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS AND SHALL BE VERIFIED ON THE JOB. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGNER PRIOR TO BEGINNING ANY WORK.
7. ALL WORK SHALL BE FIRST QUALITY, PERFORMED IN A WORKMANLIKE MANNER, AND IN KEEPING WITH ACCEPTED BUILDING PRACTICES.
8. ALL FIXTURES, EQUIPMENT, AND SPECIALTY ITEM SIZES AND REQUIREMENTS SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION AND INSTALLATION.

1 GENERAL NOTES

2

3

4 APPROVALS

THIS DRAWING IS NOT FINAL AND IS NOT TO BE USED FOR CONSTRUCTION UNTIL STAMPED AND WET-SIGNED BY THE PROJECT ENGINEER.
Construction contractor agrees that in accordance with generally accepted construction practices, construction contractor will be required to assume sole and complete responsibility for job site conditions during the course of construction of the project, including safety of all persons and property; that this requirement shall be made to apply continuously and not be limited to normal working hours, and construction contractor further agrees to defend, indemnify and hold design professional harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting liability arising from the sole negligence of design professional.

20 16 12 8

MARK	DATE	DESCRIPTION	BY

REVISIONS

CLIENT:
MAILING ADDRESS:
CITY OF JACKSON
33 BROADWAY
JACKSON, CA 95642
(209)-223-1646

TAILING WHEEL COVER FOR:
THE CITY OF JACKSON
JACKSON GATE ROAD
CITY OF JACKSON--CALIFORNIA
A.P.N. 020-070-018-000

WEATHERBY-REYNOLDS-FRITSON
ENGINEERING AND DESIGN
REGISTERED PROFESSIONAL ENGINEER
TERRENCE E. WEATHERBY
No. S3321
LIC. EXP. 12-31-05
STRUCTURAL
STATE OF CALIFORNIA
(209)-223-0381 [Voice]
(209)-223-0716 [Fax]
206 Peek Street
Jackson, CA. 95642
http://www.wrfed.com

THESE DRAWINGS AND THE CONCEPTS EMBODIED THEREIN ARE THE ORIGINAL UNPUBLISHED WORK OF WRF ENGINEERING AND DESIGN AND SHALL NOT BE USED OR DUPLICATED WITHOUT THE WRITTEN AGREEMENT OF TERRY WEATHERBY, GRANT REYNOLDS, OR KEVIN FRITSON

DRAWINGS

TAILING WHEEL BUILDING COVER PLAN--NOTES

FILE NO.	D-6072
DRAWN BY	KDF
DATE	02-2012
SCALE	AS NOTED
SHEET	A1
OF	SHEETS

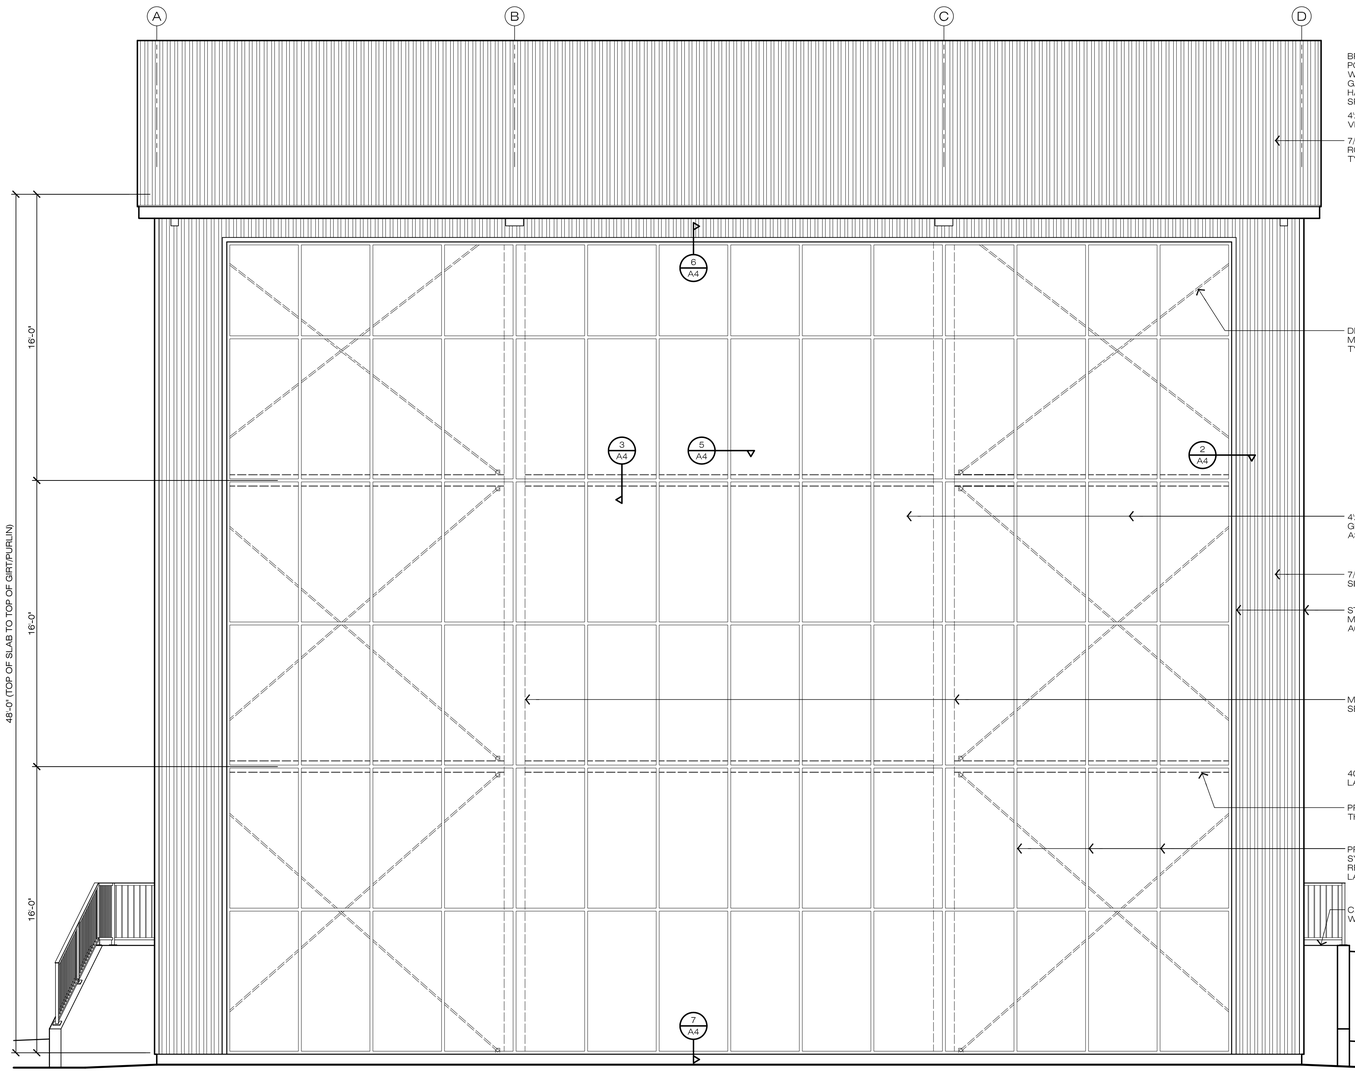

WEST

SCALE: 1/4" = 1'-0"

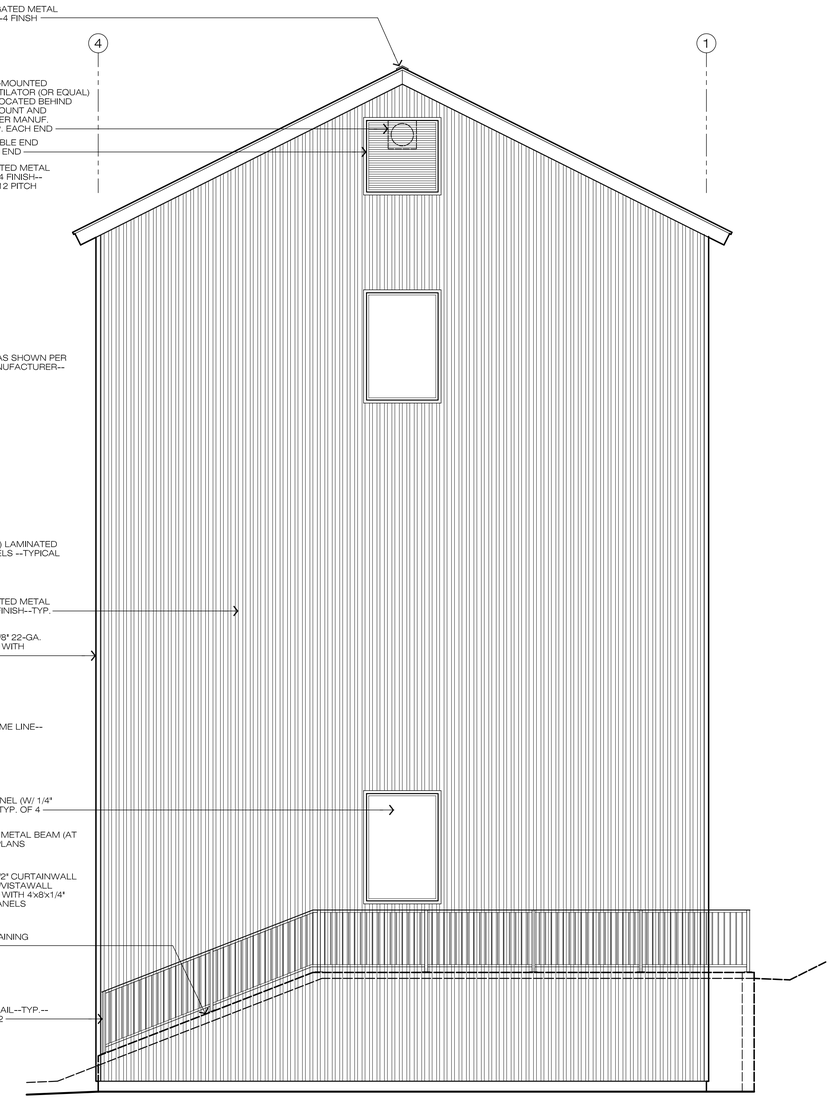

SOUTH

SCALE: 1/4" = 1'-0"

19 EXTERIOR ELEVATIONS

4 APPROVALS

THIS DRAWING IS NOT FINAL AND IS NOT TO BE USED FOR CONSTRUCTION UNTIL STAMPED AND WET-SIGNED BY THE PROJECT ENGINEER.

Construction contractor agrees that in accordance with generally accepted construction practices, construction contractor will be required to assume sole and complete responsibility for job site conditions during the course of construction of the project, including safety of all persons and property; that this requirement shall be made to apply continuously and not be limited to normal working hours, and construction contractor further agrees to defend, indemnify and hold design professional harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting liability arising from the sole negligence of design professional.

20 | 16 | 12 | 8

MARK	DATE	DESCRIPTION	BY

REVISIONS

CLIENT:

MAILING ADDRESS:

CITY OF JACKSON
33 BROADWAY
JACKSON, CA 95642
(209)-223-1646

TAILING WHEEL COVER FOR:
THE CITY OF JACKSON

JACKSON GATE ROAD
CITY OF JACKSON--CALIFORNIA
A.P.N. 020-070-018-000

WEATHERBY-REYNOLDS-FRITSON

ENGINEERING AND DESIGN

REGISTERED PROFESSIONAL ENGINEER
TERRANCE E. WEATHERBY
No. S3321
LIC. EXP. 12-31-05
STRUCTURAL
STATE OF CALIFORNIA

(209)-223-0381 [Voice]
(209)-223-0716 [Fax]
206 Peek Street
Jackson, CA. 95642
http://www.wrfed.com

THESE DRAWINGS AND THE CONCEPTS EMBODIED THEREIN ARE THE ORIGINAL UNPUBLISHED WORK OF WRF ENGINEERING AND DESIGN AND SHALL NOT BE USED OR DUPLICATED WITHOUT THE WRITTEN AGREEMENT OF TERRY WEATHERBY, GRANT REYNOLDS, OR KEVIN FRITSON

DRAWINGS

SOUTH AND WEST EXTERIOR ELEVATIONS

FILE NO.	D-6072
DRAWN BY	KDF
DATE	02-2012
SCALE	AS NOTED
SHEET	A2
OF	SHEETS

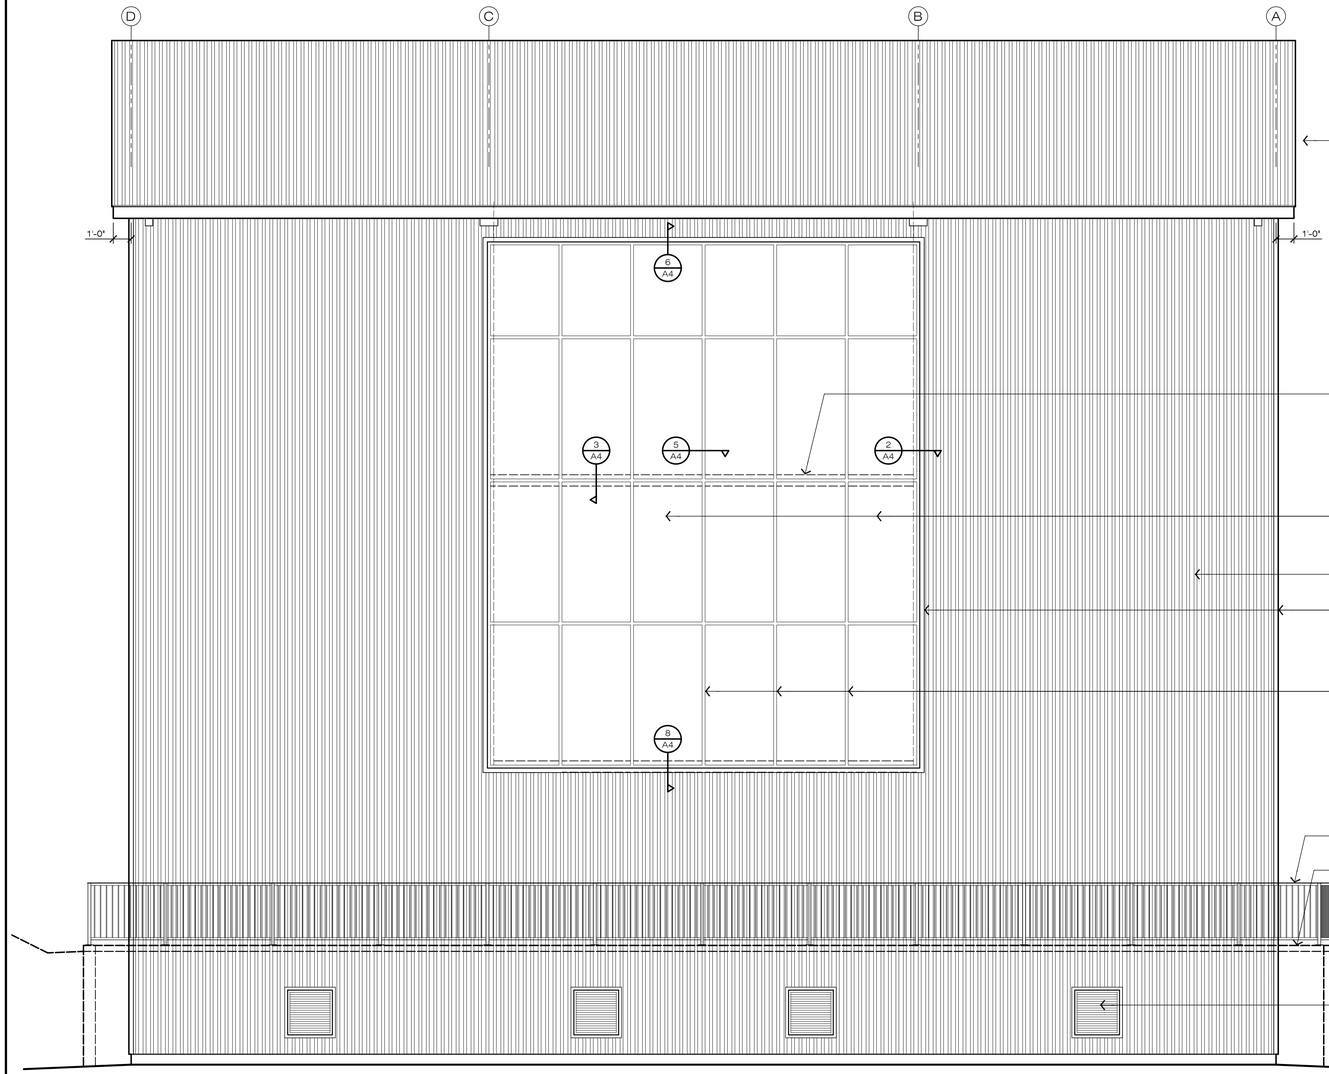

EAST

SCALE: 1/4" = 1'-0"

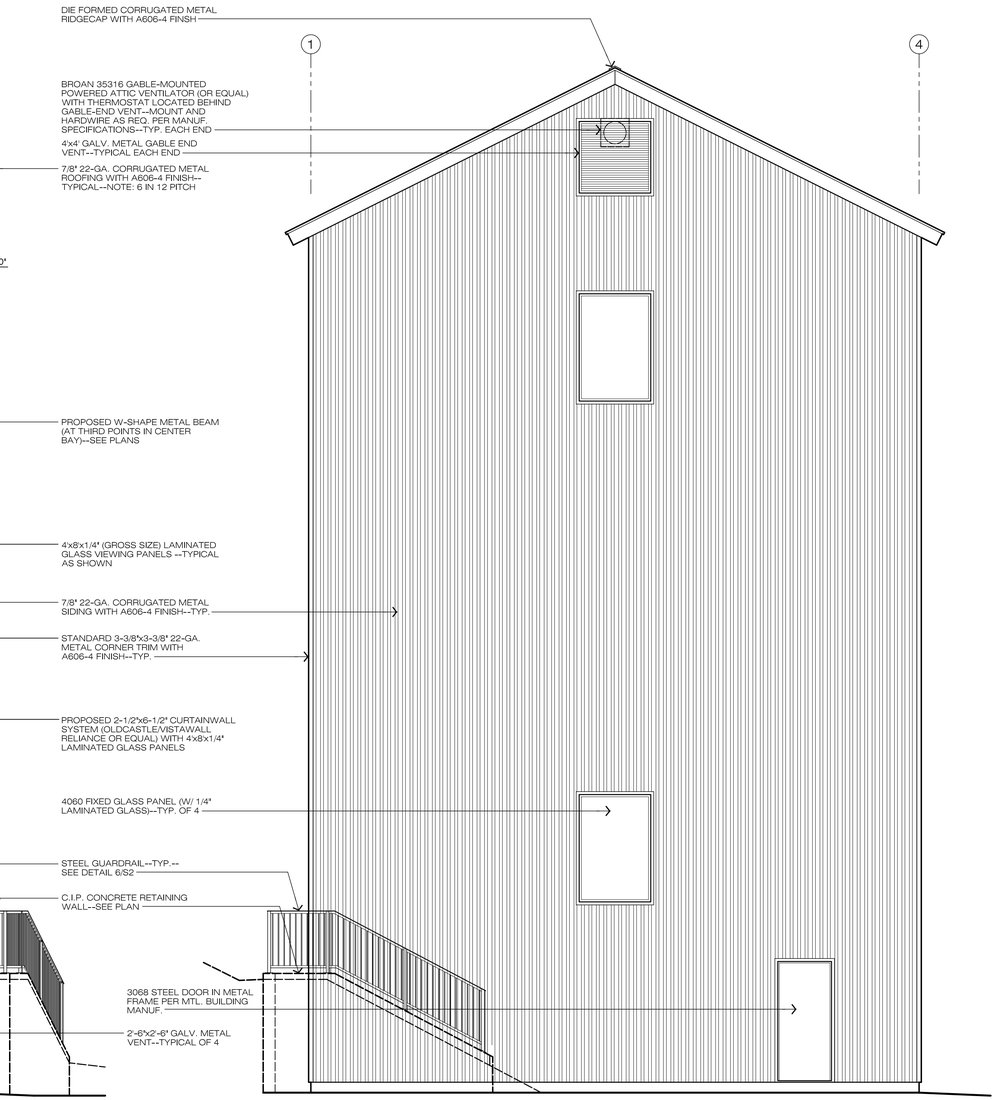

NORTH

SCALE: 1/4" = 1'-0"

19 EXTERIOR ELEVATIONS

20

16

12

8

4 APPROVALS

THIS DRAWING IS NOT FINAL AND IS NOT TO BE USED FOR CONSTRUCTION UNTIL STAMPED AND WET-SIGNED BY THE PROJECT ENGINEER.

Construction contractor agrees that in accordance with generally accepted construction practices, construction contractor will be required to assume sole and complete responsibility for job site conditions during the course of construction of the project, including safety of all persons and property; that this requirement shall be made to apply continuously and not be limited to normal working hours, and construction contractor further agrees to defend, indemnify and hold design professional harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting liability arising from the sole negligence of design professional.

MARK	DATE	DESCRIPTION	BY

REVISIONS

CLIENT:

MAILING ADDRESS:

CITY OF JACKSON
33 BROADWAY
JACKSON, CA 95642
(209)-223-1646

TAILING WHEEL COVER FOR:
THE CITY OF JACKSON

JACKSON GATE ROAD
CITY OF JACKSON--CALIFORNIA
A.P.N. 020-070-018-000

WEATHERBY-REYNOLDS-FRITSON

ENGINEERING AND DESIGN

REGISTERED PROFESSIONAL ENGINEER
TERRENCE E. WEATHERBY
No. S3321
LIC. EXP. 12-31-05
STRUCTURAL
STATE OF CALIFORNIA

(209)-223-0381 [Voice]
(209)-223-0716 [Fax]
206 Peek Street
Jackson, CA. 95642
http://www.wrfed.com

THESE DRAWINGS AND THE CONCEPTS EMBODIED THEREIN ARE THE ORIGINAL UNPUBLISHED WORK OF WRF ENGINEERING AND DESIGN AND SHALL NOT BE USED OR DUPLICATED WITHOUT THE WRITTEN AGREEMENT OF TERRY WEATHERBY, GRANT REYNOLDS, OR KEVIN FRITSON

DRAWINGS

NORTH AND EAST EXTERIOR ELEVATIONS

FILE NO.	D-6072
DRAWN BY	KDF
DATE	02-2012
SCALE	AS NOTED
SHEET	A3
OF	SHEETS

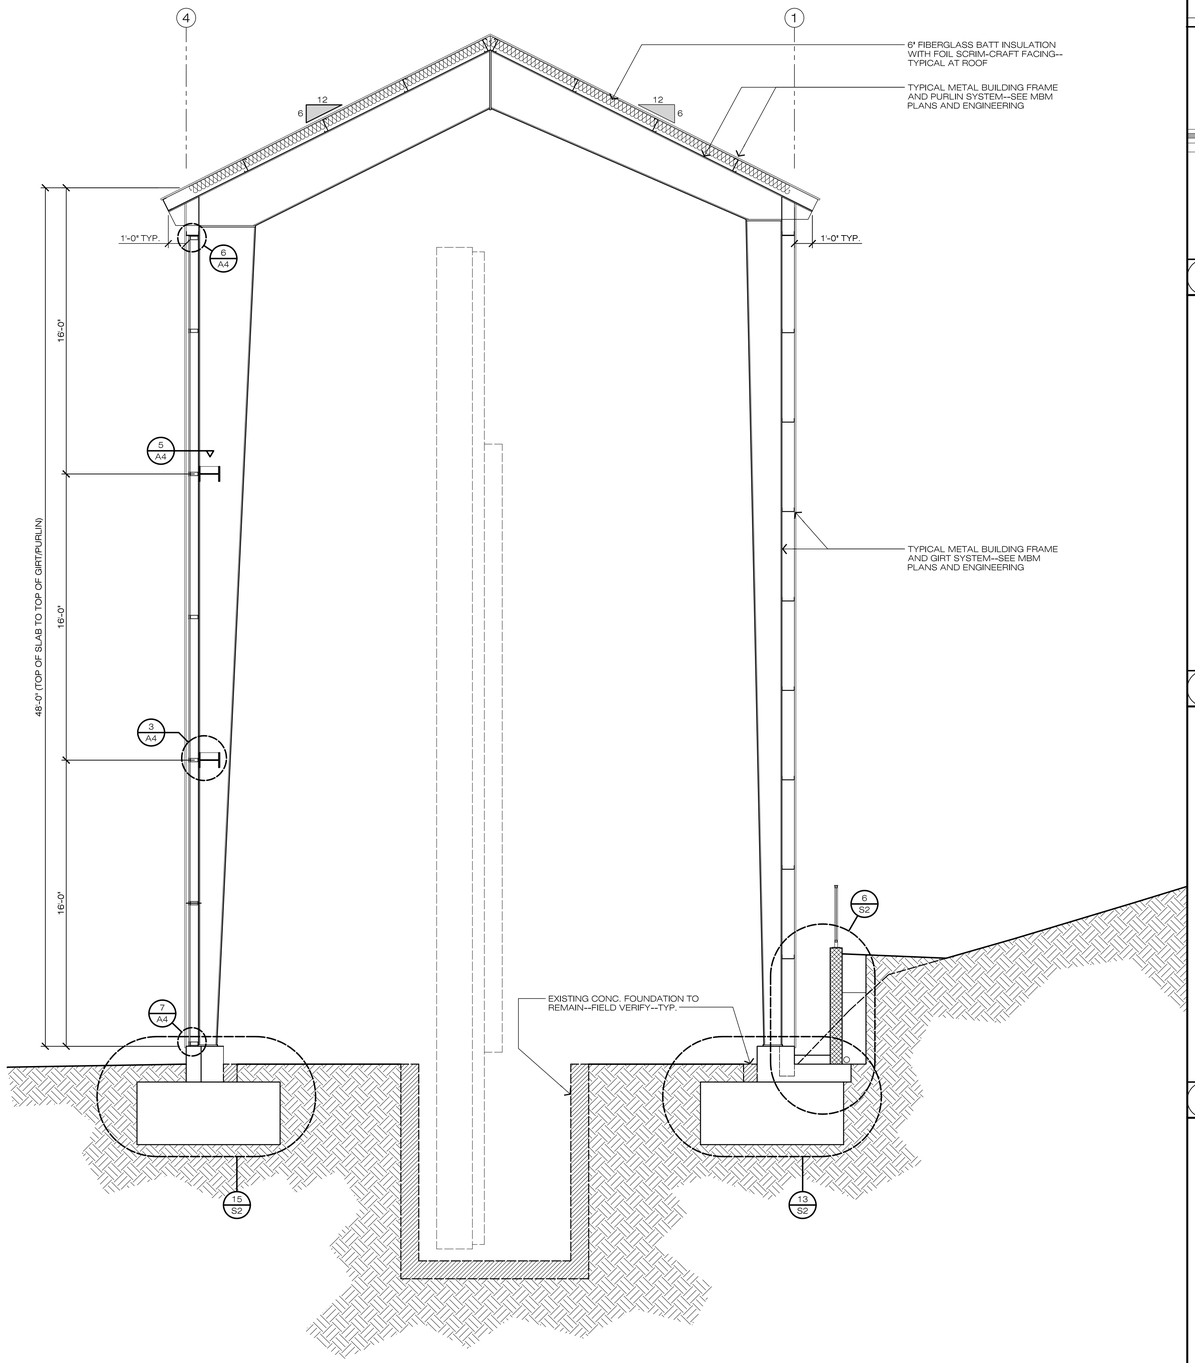

SCALE: 1/4" = 1'-0"

20 BUILDING CROSS SECTION

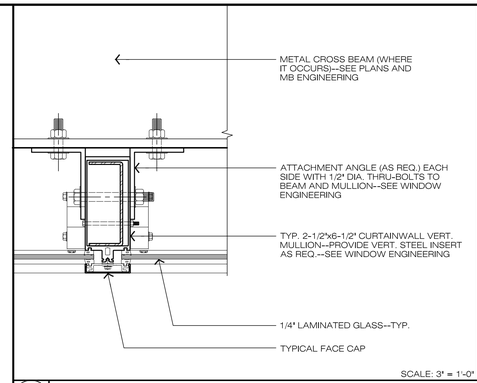

SCALE: 3" = 1'-0"

5 CURTAINWALL AT VERT. MULLION

1. THE CONTRACTOR SHALL USE A 2-1/2"x6-1/2" GLAZED DARK-BRONZE ALUMINUM CURTAIN WALL SYSTEM (OLDCASTLE/VISTAWALL RELIANCE WALL OR EQUAL) PER THE PROJECT DRAWINGS.
2. ALL GLAZING SHALL BE 1/4" LAMINATED GLASS.
3. THE CONTRACTOR SHALL PROVIDE ENGINEERING AND WORKING DRAWINGS FOR THE CURTAIN WALL SYSTEM UTILIZED FOR REVIEW BY THE PROJECT ENGINEER. ANY DEVIATIONS FROM OR DISCREPANCIES IN THE PROJECT DRAWINGS SHALL BE BROUGHT TO THE ATTENTION OF THE PROJECT ENGINEER IMMEDIATELY. DESIGN SHALL BE BASED ON THE CURRENT DESIGN REQUIREMENTS PER THE CITY OF JACKSON. DESIGN SHALL BE COORDINATED WITH THE STRUCTURAL DESIGN OF THE METAL BUILDING IN ORDER TO ACCOMMODATE THE CURTAIN WALL LOADING REQUIREMENTS INTO THE STRUCTURE.
4. REFER TO THE SPECIFICATIONS SECTION III-2.05 AND SECTION III-2.06 FOR COMPLETE DETAILED SPECIFICATIONS AND REQUIREMENTS FOR GLAZING AND CURTAINWALL SYSTEMS.
5. ALL CONNECTIONS AND ATTACHMENTS FOR CURTAIN WALL SYSTEM SHALL BE DESIGNED AND SUPPLIED BY SELECTED CURTAIN WALL SYSTEM MANUFACTURER.

1 CURTAINWALL / GLAZING NOTES

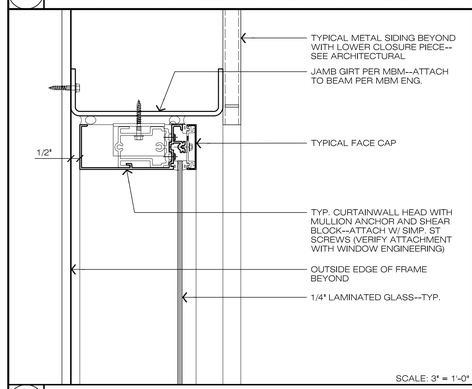

SCALE: 3" = 1'-0"

6 TYP. CURTAINWALL AT HEAD

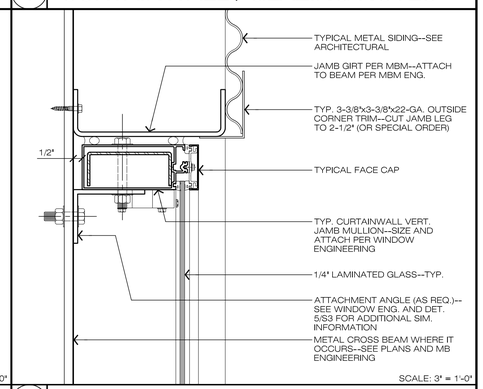

SCALE: 3" = 1'-0"

2 TYP. CURTAINWALL AT JAMB

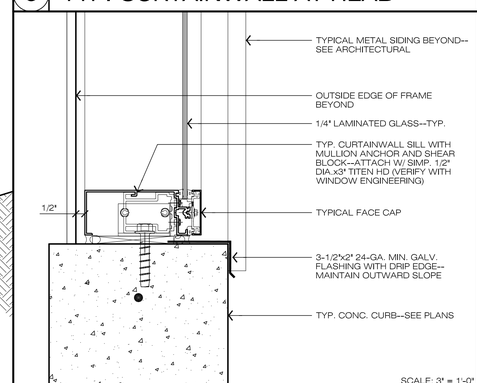

SCALE: 3" = 1'-0"

7 TYP. CURTAINWALL AT SILL

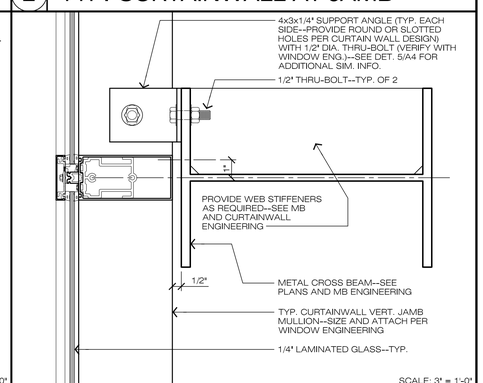

SCALE: 3" = 1'-0"

3 CURTAINWALL AT MID-SPAN BEAM

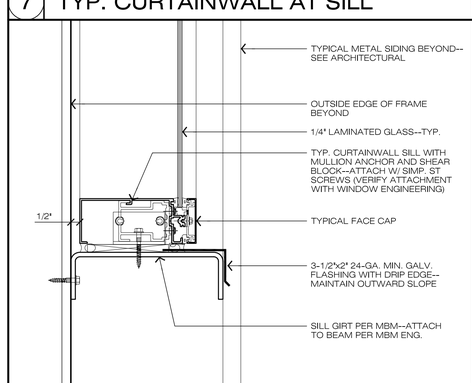

SCALE: 3" = 1'-0"

8 TYP. CURTAINWALL AT SILL

4 APPROVALS

THIS DRAWING IS NOT FINAL AND IS NOT TO BE USED FOR CONSTRUCTION UNTIL STAMPED AND WET-SIGNED BY THE PROJECT ENGINEER.

Construction contractor agrees that in accordance with generally accepted construction practices, construction contractor will be required to assume sole and complete responsibility for job site conditions during the course of construction of the project, including safety of all persons and property; that this requirement shall be made to apply continuously and not be limited to normal working hours, and construction contractor further agrees to defend, indemnify and hold design professional harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting liability arising from the sole negligence of design professional.

MARK	DATE	DESCRIPTION	BY

REVISIONS

CLIENT:

MAILING ADDRESS:

CITY OF JACKSON
33 BROADWAY
JACKSON, CA 95642
(209)-223-1646

TAILING WHEEL COVER FOR:

THE CITY OF JACKSON

JACKSON GATE ROAD
CITY OF JACKSON--CALIFORNIA
A.P.N. 020-070-018-000

WEATHERBY-REYNOLDS-FRITSON

ENGINEERING AND DESIGN

REGISTERED PROFESSIONAL ENGINEER
TERRENCE E. WEATHERBY
No. S3321
LIC. EXP. 12-31-05
STRUCTURAL
STATE OF CALIFORNIA

(209)-223-0381 [Voice]
(209)-223-0716 [Fax]
206 Peek Street
Jackson, CA. 95642
http://www.wrfed.com

THESE DRAWINGS AND THE CONCEPTS EMBODIED THEREIN ARE THE ORIGINAL UNPUBLISHED WORK OF WRF ENGINEERING AND DESIGN AND SHALL NOT BE USED OR DUPLICATED WITHOUT THE WRITTEN AGREEMENT OF TERRY WEATHERBY, GRANT REYNOLDS, OR KEVIN FRITSON

DRAWINGS

BUILDING SECTION--CURTAINWALL NOTES AND DETAILS

FILE NO.	D-6072
DRAWN BY	KDF
DATE	02-2012
SCALE	AS NOTED

SHEET

A4

OF SHEETS

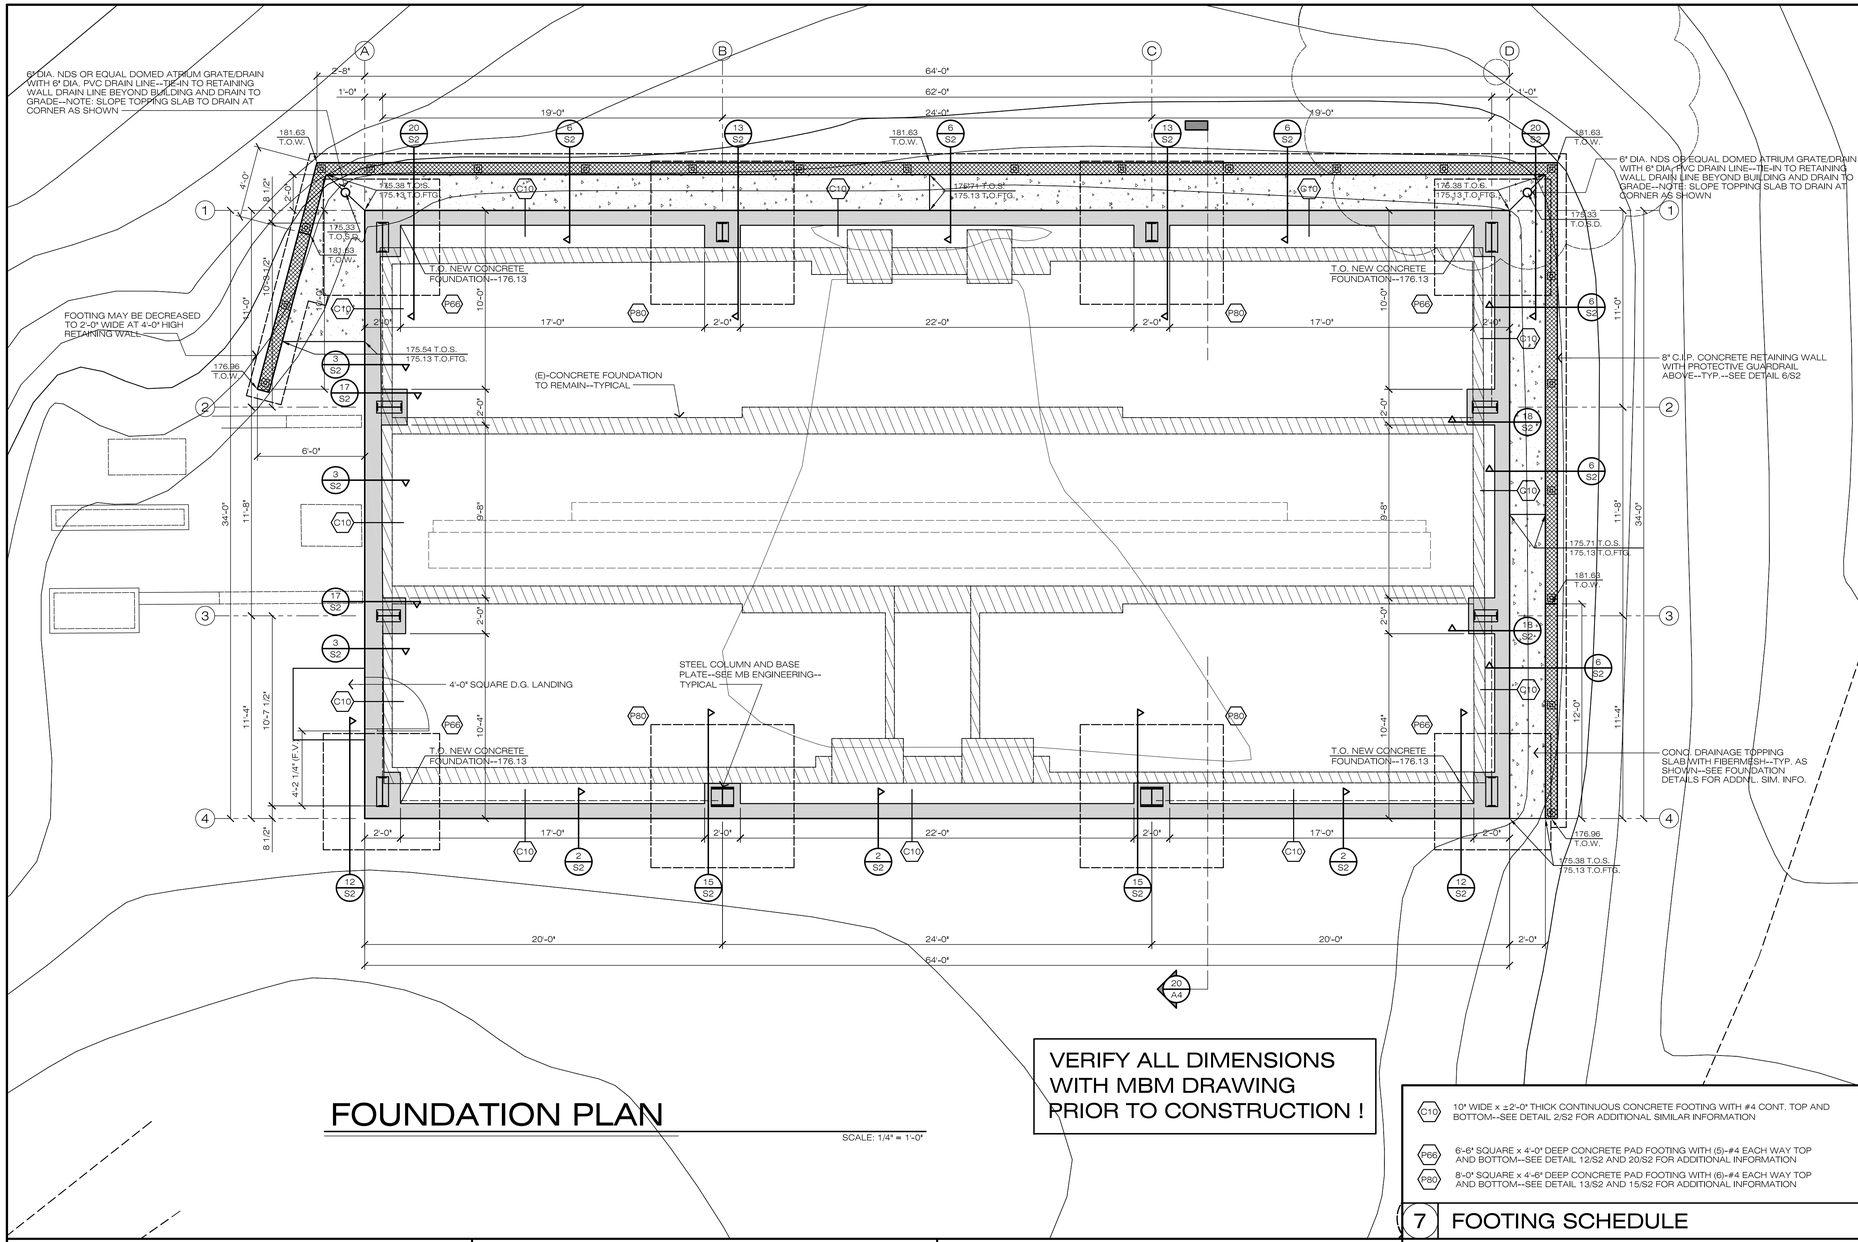

FOUNDATION PLAN

SCALE: 1/4" = 1'-0"

DESCRIPTION:	HISTORICAL PRESERVATION SHELTER
BUILDING AREA:	34' x 64' = 2,176 SQ. FT. < 24,000 SQ. FT. O.K.
	BUT, SINCE 2,176 < 5,000, NO FIRE SPRINKLER SYSTEM IS REQUIRED
BUILDING OCCUPANCY:	U
OCCUPANCY LOAD FACTOR:	500
OCCUPANCY LOAD:	2,176 / 500 = 4.35 < 30 SO ONE EXIT REQUIRED
	ONE EXIT PROVIDED
CONSTRUCTION TYPE:	III-B
FIRE SEPARATION REQ'D:	NONE
DEFERRED SUBMITTALS:	ELECTRICAL DRAWINGS DESIGN BUILD (AS REQ. BY BLDG. DEPT.)
	MECHANICAL DRAWINGS DESIGN BUILD (AS REQ. BY BLDG. DEPT.)
	FIRE SPRINKLER DRAWINGS (NOT REQUIRED)

1 BUILDING PROJECT DATA

1. ALL WORK SHALL CONFORM TO THE CALIFORNIA BUILDING CODE, 2010 EDITION, AND THE LATEST EDITION OF THE ACI STANDARDS.
2. ALL CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH (f'c) OF 3,000 PSI IN 28 DAYS. FIBERMESH SHALL BE AS MANUFACTURED BY THE FIBERMESH MANUFACTURER AND USE IN ACCORDANCE WITH ICC REPORT NO. ESR-1165. DESIGN BASED ON 2,500 PSI SO NO SPECIAL INSPECTION REQUIRED.
3. REINFORCING STEEL SHALL BE DEFORMED BARS CONFORMING TO ASTM A-615, GRADE 40, U.N.O. FABRICATING DETAILS SHALL CONFORM TO THE ACI STANDARDS AND THE CBC. FIELD WELDING OF REINFORCING STEEL WILL NOT BE ALLOWED.
4. (NOT USED)
5. THE UPPER SUBGRADE BELOW FILL AND ALL FILL SHALL HAVE 90% RELATIVE COMPACTION PER ASTM D-1557 TEST METHOD, U.N.O.
6. ALL ANCHOR BOLTS SHALL BE ASTM A-307 OR A-36 THREADED RODS.
7. ALL EMBEDDED ITEMS SHALL BE SECURE AND IN PLACE PRIOR TO POURING CONCRETE.
8. STRUCTURAL STEEL SHALL CONFORM TO ASTM A-36 MINIMUM, UNLESS NOTED OTHERWISE. ALL WELDING SHALL BE WITH E70 ELECTRODES BY THE MANUAL SHIELDING ARC METHOD. ALL WELDING SHALL BE PERFORMED BY CERTIFIED WELDERS. WELDING TECHNIQUE AND WORKMANSHIP SHALL CONFORM TO THE STRUCTURAL WELDING CODE OF THE AMERICAN WELDING SOCIETY.
9. CONTRACTOR SHALL VERIFY ALL DIMENSIONS WITH METAL BUILDING MANUFACTURER PRIOR TO STARTING WORK. NOTIFY ENGINEER IMMEDIATELY IF ANY DISCREPANCIES ARE FOUND. IT IS THE INTENT OF THESE DRAWINGS THAT PAD FOOTINGS ARE TO BE CENTERED BELOW THE STEEL BASE PLATES OF ALL COLUMNS IN THE METAL BUILDING.
10. ADDITIONAL REQUIREMENTS FOR METAL BUILDING MANUFACTURER:
    A. METAL BUILDING MANUFACTURER SHALL BE RESPONSIBLE FOR THE DESIGN AND FABRICATION OF ALL COMPONENTS AND MATERIALS RELATED TO THE METAL BUILDING SYSTEM NOT OTHERWISE DETAILED OR SPECIFIED ON THIS DRAWING.
    B. MEMBER SIZES, FORCES AND CONNECTION DETAILS COORDINATED WITH AND CONFORMING TO THESE DRAWINGS SHALL BE FURNISHED BY THE MANUFACTURER. THE SHOP DRAWINGS AND CALCULATIONS SHALL BE SUPERVISED AND SIGNED BY A CALIFORNIA REGISTERED PROFESSIONAL ENGINEER.
    C. DESIGN LOADING SHALL BE BASED ON THE CALIFORNIA BUILDING CODE (CBC), 2010 EDITION. DESIGN SHALL TAKE INTO CONSIDERATION ALL CONCENTRATED LOADS (BEAMS, PURLINS, ETC.) ADDITIONAL PURLINS SHALL BE PROVIDED AS REQUIRED TO CARRY WEIGHT OF ANY MECHANICAL UNITS, IF APPLICABLE.
11. CONTRACTOR SHALL SUBMIT CALCULATIONS FROM METAL BUILDING MANUFACTURER TO THIS OFFICE FOR APPROVAL PRIOR TO CONSTRUCTION.
12. BUILDING SHALL BE 20'-0" MINIMUM FROM ALL PROPERTY LINES, U.N.O.
13. DESIGNATED EXIT DOORS SHALL: HAVE MAXIMUM 1/2" THRESHOLD; HAVE LEVER HARDWARE (PANIC OR PUSH-PULL); HAVE MAXIMUM OPERATIONAL FORCE OF 8.5 LBS. ; HAVE HARDWARE OPENABLE FROM THE INSIDE WITHOUT KEY, SPECIAL KNOWLEDGE, OR EFFORT; AND HAVE SINGLE EFFORT, NON-GRASP, HARDWARE CENTERED BETWEEN 30" AND 44" ABOVE THE FLOOR.
14. PROVIDE LIGHTING PER CBC SECTION 1205 AND VENTILATION PER CBC SECTION 1203. SEE DRAWINGS BY OTHERS.
15. THIS ENGINEER SHALL BE CONSIDERED THE PROJECT ENGINEER FOR THE REFERENCED BUILDING IN CONFORMANCE TO CBC APPENDIX CHAPTER 1, SECTION 106.3.4.
16. SPECIAL INSPECTION MAY BE REQUIRED PER CBC 1704.3.3 FOR HIGH STRENGTH BOLTING IF USED ON M.B.M. DRAWINGS (VERIFY). IF HIGH STRENGTH BOLTS ARE USED, INSPECTION OF HIGH STRENGTH BOLT INSTALLATIONS SHALL BE MADE IN ACCORDANCE WITH DIVISION IV BY AN INSPECTOR SPECIALLY APPROVED FOR THAT PURPOSE BY THE ENFORCEMENT AGENCY. THE INSPECTOR SHALL CHECK THE MATERIALS, EQUIPMENT, DETAILS OF CONSTRUCTION AND INSTALLATION PROCEDURE. THE INSPECTOR SHALL FURNISH THIS STRUCTURAL ENGINEER AND THE ENFORCEMENT AGENCY WITH A REPORT THAT THE WORK HAS BEEN COMPLETED IN EVERY MATERIAL RESPECT IN COMPLIANCE WITH THE APPROVED PLANS AND SPECIFICATIONS.

    ALL HIGH STRENGTH BOLTS ARE A325-N UNLESS SPECIFICALLY NOTED OTHERWISE ON M.B.M. DWGS.

    STRUCTURAL BOLTS SHALL BE TIGHTENED BY THE TURN-OF-THE-NUT METHOD IN ACCORDANCE WITH THE NINTH EDITION, AISC "SPECIFICATION FOR STRUCTURAL JOINTS USING ASTM A325 OR A490 BOLTS" PER SECTION 8D.1, A325 BOLTS MAY BE INSTALLED WITHOUT WASHERS WHEN TIGHTENED BY THE TURN-OF-THE-NUT METHOD.
17. FOUNDATION DESIGN BASED ON ALLOWABLE BEARING OF 1,500 PSF PER CBC TABLE 1804.A.2.

2 FOUNDATION NOTES

C10	10" WIDE x ±2'-0" THICK CONTINUOUS CONCRETE FOOTING WITH #4 CONT. TOP AND BOTTOM--SEE DETAIL 2/S2 FOR ADDITIONAL SIMILAR INFORMATION
P66	6'-6" SQUARE x 4'-0" DEEP CONCRETE PAD FOOTING WITH (5)-#4 EACH WAY TOP AND BOTTOM--SEE DETAIL 12/S2 AND 20/S2 FOR ADDITIONAL INFORMATION
P80	8'-0" SQUARE x 4'-6" DEEP CONCRETE PAD FOOTING WITH (6)-#4 EACH WAY TOP AND BOTTOM--SEE DETAIL 13/S2 AND 15/S2 FOR ADDITIONAL INFORMATION

7 FOOTING SCHEDULE

T.O.S.	TOP OF SLAB
T.O. FTG.	TOP OF FOOTING
T.O.W.	TOP OF WALL
T.O.S.D.	TOP OF SLAB AT DRAIN
DIA.	DIAMETER
MBM	METAL BUILDING MANUFACTURER
D.G.	DECOMPOSED GRANITE
F.V.	FIELD VERIFY

8 ABBREVIATIONS

4 APPROVALS

THIS DRAWING IS NOT FINAL AND IS NOT TO BE USED FOR CONSTRUCTION UNTIL STAMPED AND WET-SIGNED BY THE PROJECT ENGINEER.

Construction contractor agrees that in accordance with generally accepted construction practices, construction contractor will be required to assume sole and complete responsibility for job site conditions during the course of construction of the project, including safety of all persons and property; that this requirement shall be made to apply continuously and not be limited to normal working hours, and construction contractor further agrees to defend, indemnify and hold design professional harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting liability arising from the sole negligence of design professional.

MARK	DATE	DESCRIPTION	BY

REVISIONS

CLIENT:
MAILING ADDRESS:
CITY OF JACKSON
33 BROADWAY
JACKSON, CA 95642
(209)-223-1646

TAILING WHEEL COVER FOR:
THE CITY OF JACKSON
JACKSON GATE ROAD
CITY OF JACKSON--CALIFORNIA
A.P.N. 020-070-018-000

WEATHERBY-REYNOLDS-FRITSON
ENGINEERING AND DESIGN
REGISTERED PROFESSIONAL ENGINEER TERRENCE E. WEATHERBY No. S3321 LIC. EXP. 12-31-05 STRUCTURAL STATE OF CALIFORNIA
(209)-223-0381 [Voice]
(209)-223-0716 [Fax]
206 Peek Street
Jackson, CA. 95642
http://www.wrfed.com

THESE DRAWINGS AND THE CONCEPTS EMBODIED THEREIN ARE THE ORIGINAL UNPUBLISHED WORK OF WRF ENGINEERING AND DESIGN AND SHALL NOT BE USED OR DUPLICATED WITHOUT THE WRITTEN AGREEMENT OF TERRY WEATHERBY, GRANT REYNOLDS, OR KEVIN FRITSON

DRAWINGS

FOUNDATION PLAN--STRUCTURAL NOTES

FILE NO.	D-6072
DRAWN BY	KDF
DATE	02-2012
SCALE	AS NOTED
SHEET	S1
OF	SHEETS

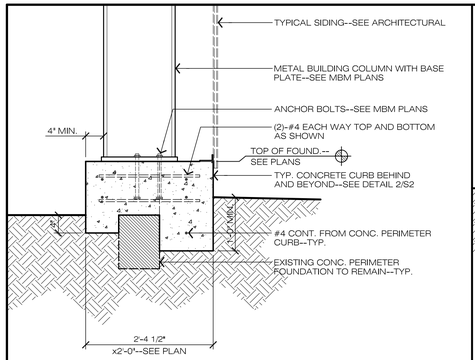

17 CONC. PEDESTAL AT COLUMN

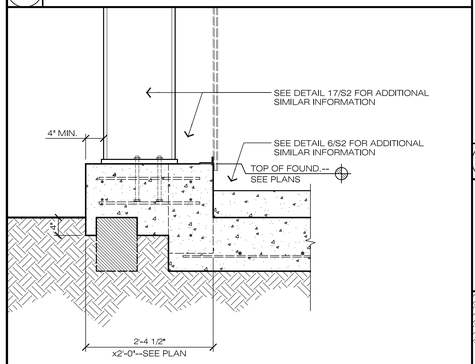

18 CONC. PEDESTAL AT COLUMN

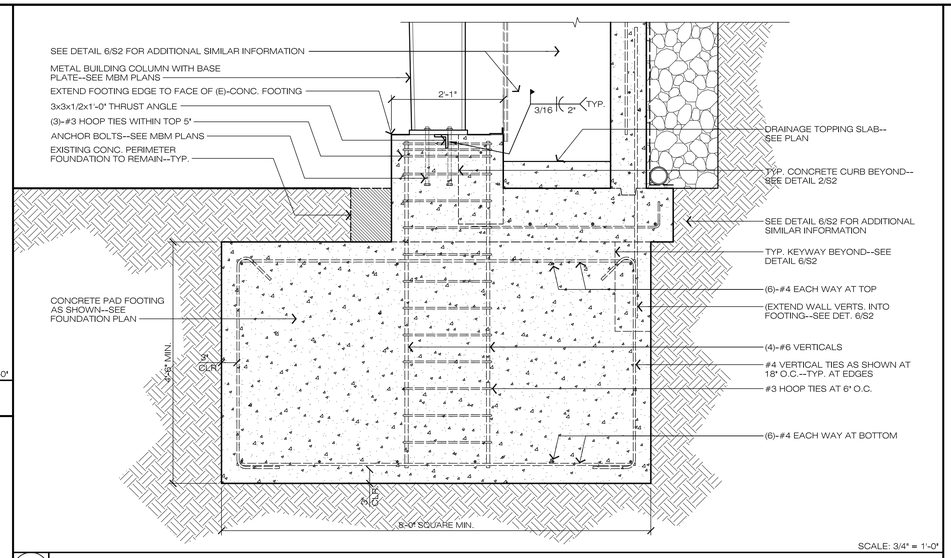

13 COLUMN AND 8'-0" SQR. PAD FOOTING AT BACK RETAINING WALL

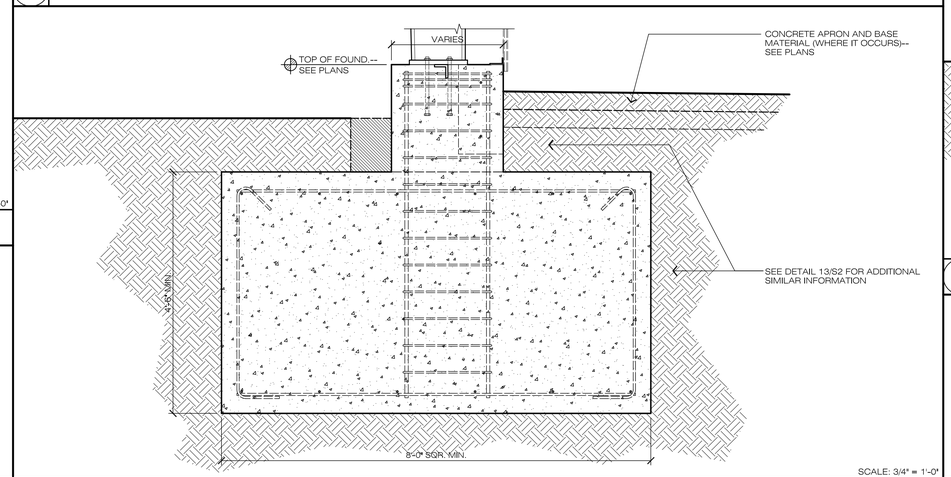

15 COLUMN AND 8'-0" SQR. PAD FOOTING AT FRONT

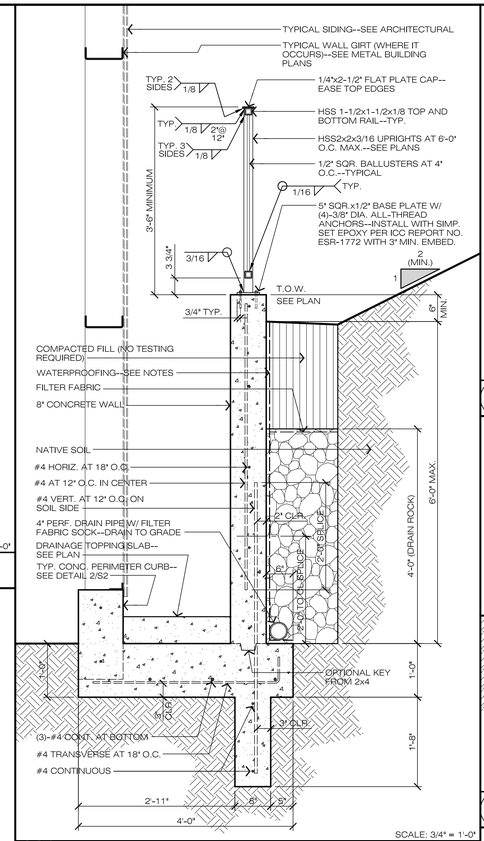

6 6'-0" CONCRETE RETAINING WALL

SEE 2/S1 FOR ALL CONCRETE AND FOUNDATION NOTES.

1 FOUNDATION NOTES

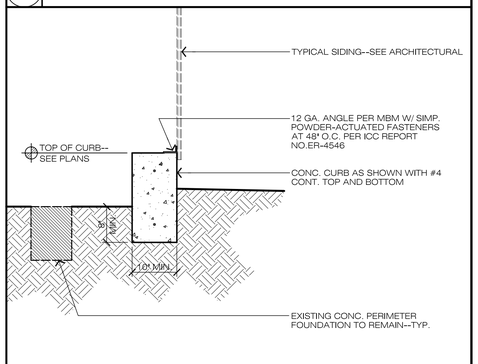

2 TYP. PERIMETER CONC. CURB

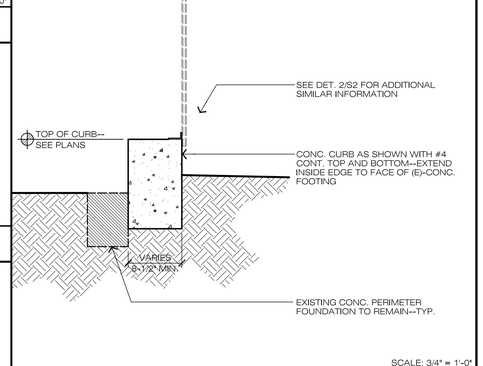

3 (N)-CURB AT ADJACENT CONC.

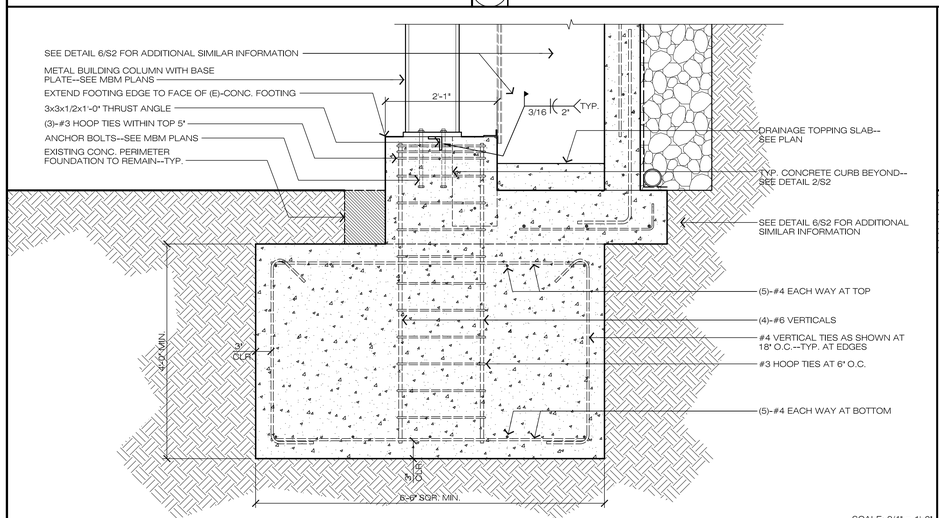

20 COLUMN AND 6'-6" SQR. PAD FOOTING AT BACK RETAINING WALL

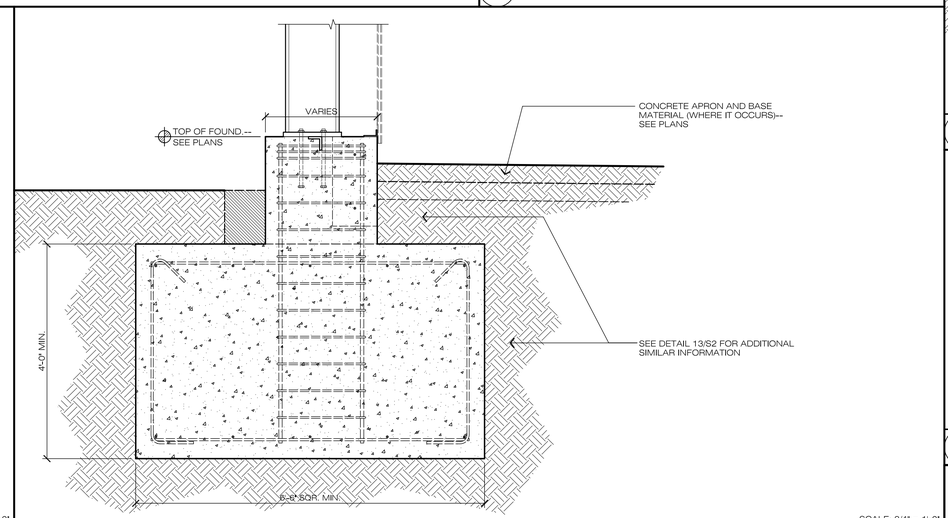

12 COLUMN AND 6'-6" SQR. PAD FOOTING AT FRONT

4 APPROVALS

THIS DRAWING IS NOT FINAL AND IS NOT TO BE USED FOR CONSTRUCTION UNTIL STAMPED AND WET-SIGNED BY THE PROJECT ENGINEER.

Construction contractor agrees that in accordance with generally accepted construction practices, construction contractor will be required to assume sole and complete responsibility for job site conditions during the course of construction of the project, including safety of all persons and property; that this requirement shall be made to apply continuously and not be limited to normal working hours, and construction contractor further agrees to defend, indemnify and hold design professional harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting liability arising from the sole negligence of design professional.

MARK	DATE	DESCRIPTION	BY

REVISIONS

TAILING WHEEL COVER FOR:
THE CITY OF JACKSON
JACKSON GATE ROAD
CITY OF JACKSON--CALIFORNIA
A.P.N. 020-070-018-000

CLIENT:
MAILING ADDRESS:
CITY OF JACKSON
33 BROADWAY
JACKSON, CA 95642
(209)-223-1646

WEATHERBY-REYNOLDS-FRITSON
ENGINEERING AND DESIGN
REGISTERED PROFESSIONAL ENGINEER
LAWRENCE E. WEATHERBY
No. S3321
LIC. EXP. 12-31-05
STRUCTURAL
STATE OF CALIFORNIA
(209)-223-0381 [Voice]
(209)-223-0716 [Fax]
206 Peek Street
Jackson, CA. 95642
http://www.wrfed.com

THESE DRAWINGS AND THE CONCEPTS EMBODIED THEREIN ARE THE ORIGINAL UNPUBLISHED WORK OF WRF ENGINEERING AND DESIGN AND SHALL NOT BE USED OR DUPLICATED WITHOUT THE WRITTEN AGREEMENT OF TERRY WEATHERBY, GRANT REYNOLDS, OR KEVIN FRITSON

DRAWINGS

FOUNDATION DETAILS

FILE NO.	D-6072
DRAWN BY	KDF
DATE	02-2012
SCALE	AS NOTED
SHEET	S2
OF	SHEETS